


mod. CAB700GBT | cod. 06240010

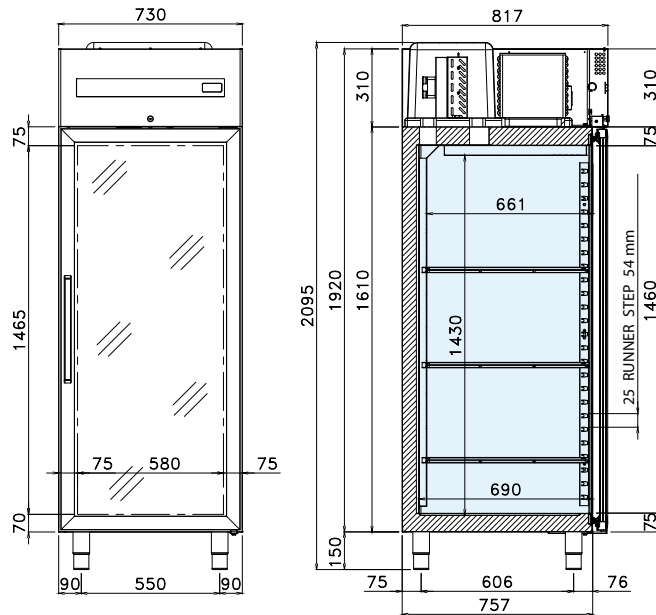

EN TECHNICAL SPECIFICATIONS

| Available temperature (°C) | Dimensions W x D x H (mm) | Packaging dimensions W x D x H (mm) | Refrigerant gas | Net volum (L) | Climate class | Energy class | Power consumption (W) | Supply voltage | Annual consumption (kWh/year) |
|----------------------------|---------------------------|-------------------------------------|-----------------|---------------|---------------|--------------|-----------------------|--------------------|-------------------------------|
| -18 / -22 | 730 x 835 x 2095 | 800 x 900 x 2300 | R290 | 465 | 4 | E | 365 | 220-240 V 50 Hz | 2957 |

EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated cabinet equipped with a monobloc unit that is tropicalized and easily removable from the body, with forced ventilated refrigeration with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 30 °C, efficiency equivalent to energy class 4
- 75 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m3
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital “touch” panel
- Automatic defrosting with electric resistance
- Automatic evaporation of condensate water by means of a heat exchanger in copper
- Reversible opening doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- U-shaped guides and adjustable and extractable racks for grids
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- Internal Led lighting as standard
- 3 GN 2/1 polyethylene grids as standard
- Height-adjustable stainless steel feet
- Lock with key

OPTIONAL

- Stainless steel couple of “U” runners
- Stainless steel grid GN 2/1
- Polyethylene tray 600 x 400 mm
- Stainless steel grid 600 x 400 mm
- Couple “L” runners for grid 600 x 400 mm
- Kit 600 x 400 mm
- Set of 4 castors

