



mod. **COU128TNP** | cod. 06620000

mod. **COU128TNPR** | cod. 06620010

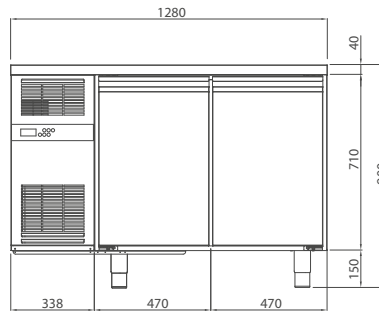

### EN TECHNICAL SPECIFICATIONS

Available temperature	Dimensions W x D x H (mm)	Packaging dimensions W x D x H (mm)	Refrigerant gas	Net volum (L)	Climate class	Energy class	Power consumption (W)	Supply voltage	Annual consumption (kWh/anno)
<b>0 / +8</b>	1280x700x900	1370x750x1100	R290	192	5	A	210	220-240 V 50 Hz	449

### EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated table with AISI 304 stainless steel worktop
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Motor inside the technical compartment
- Forced ventilated refrigeration with protected evaporators positioned between the compartments
- 60 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m<sup>3</sup>
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to energy class 5
- Automatic defrosting with compressor cut off in the 0/+8° C version
- Automatic defrosting with electric resistance in the -2/+8° C version
- Automatic evaporation of condensate water by means of a copper heat exchanger
- Internal dimensions GN 1/1
- Door hinges with automatic closing system
- Easily removable magnetic door and drawer gaskets
- Rounded internal corners and removable parts to facilitate cleaning
- Temperature detection by means of a thermistor sensor (NTC probe)
- Evaporator painted for cataphoresis with high corrosion resistance
- Height-adjustable stainless steel feet

**COU128TNPR - cod. 06620010:** version with round edge worktop

**V-2+8COU - cod. 06690010:** -2/+8 °C working temperatur version

### OPTIONAL

- Stainless steel grid GN 1/1
- Stainless steel couple of "U" runners
- Set of 4/6 castors
- Lock with key
- Sink above the unit
- Neutral drawer above the unit
- Spare drawers' kit  
(1/2 + 1/2 - 1/3 + 2/3 - 1/3 + 1/3 + 1/3)
- Glass door and Led lighting

